




FITTINGS, TUBING & VALVES

Supplying Sanitary Distributors who Service
the Beverage, Dairy, Food, Brewery, Bakery,
Cosmetic, and Nutraceutical Industries

Sanitary AIR BLOW CHECK VALVE

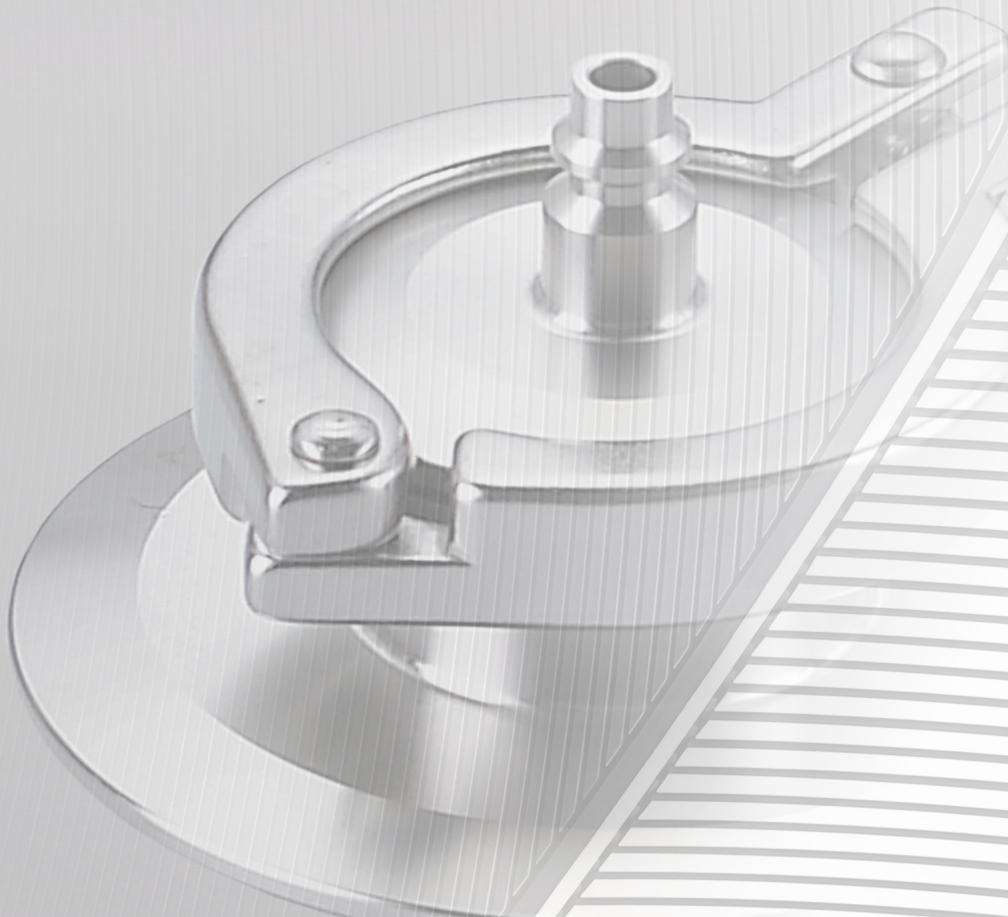

AIR BLOW CHECK VALVE

NEW!

FEATURES:

- All metal product contact surfaces are 316L
- Compatible with Wayland Y-Ball Check Valve
- Polished 32R_a finish on all wetted surfaces
- EPDM stem seat and gasket
- Available with 3 end-connections: quick-connect, female NPT, and hose barb
- Field serviceable (no special tools required)
- Maximum operating pressure: 145 PSI
- Maximum operating temperature: 212°F
- 3A certified (58-02) #3773



AIR BLOW CHECK VALVE PART NUMBERS



VALVE SIZE	QUICK-CONNECT	FNPT	HOSE BARB
1-1/2"	W645AB-1/15-QC	W645AB-1/15-FNPT	W645AB-1/15-HB
2"	W645AB-2-QC	W645AB-2-FNPT	W645AB-2-HB
2-1/2"	W645AB-25-QC	W645AB-25-FNPT	W645AB-25-HB
3"	W645AB-3-QC	W645AB-3-FNPT	W645AB-3-HB
4"	W645AB-4-QC	W645AB-4-FNPT	W645AB-4-HB




SIZING CHART

When using air blow check valves with ball check valves, refer to the sizing chart

BALL CHECK VALVE SIZE	AIR BLOW CHECK VALVE SIZE
1-1/2"	2"
2"	2-1/2"
2-1/2"	3"
3"	4"




AIR BLOW CHECK VALVE

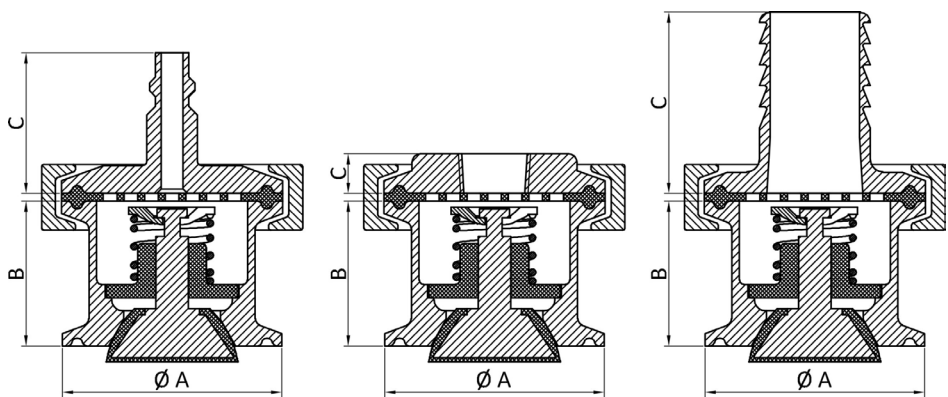

DIMENSIONS (inches)

SIZE	A	B	C (QUICK CONNECT)	C (FNPT)	C (HOSE BARB)
1-1/2	1.98	1.30	1.26	0.6	1.7
2	2.51	1.30	1.26	0.6	1.7
2-1/2	3.05	1.30	1.26	0.6	1.7
3	3.58	1.30	1.26	0.6	1.7
4	4.68	1.30	1.26	0.6	1.7

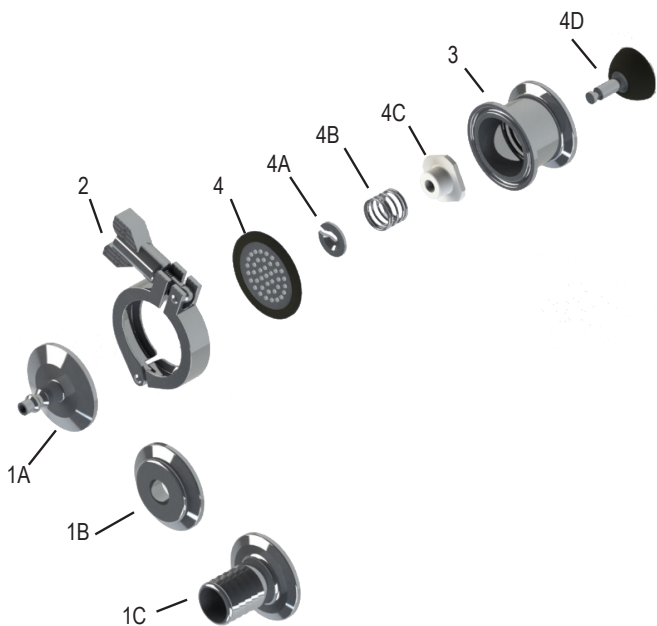

ITEM	DESCRIPTION	MATERIAL	QTY
1A	1/4" Air Line Quick Connect	316L	1
1B	1/2" NPT Cap	316L	1
1C	1" Hose Barb	316L	1
2	Single Pin Clamp	CF8	1
3	Valve Body	316L	1
4	Perforated Disc	EPDM / 316L	1
4A	Spring Retainer	304	1
4B	Spring	304	1
4C	Stem Guide	Nylon	1
4D	Stem and Plug	316L / EPDM	1